

MCS-710

Fully Wireless Siren



Installation Instructions

1. INTRODUCTION

The MCS-710 is an indoor or outdoor fully wireless siren, designed for installation in areas in which wiring action is difficult or impossible. There is no need for an external power supply. The MCS-710 is powered by an internal non-chargeable battery.

The siren communicates with the PowerMax+, PowerMax Pro or PowerMaxComplete. When an identified activation command is received from the control panel, the siren activates its sounder, activates its flash lights and acknowledges its activation to the alarm system.

The MCS-710 and the control panel should be located in the same house.

MCS-710 Features

- Designed for indoor or outdoor use**
 The siren has double plastic cover for extra protection against rain and sun.
- Distinguishable siren fire and burglar alarms**
Fire alarm: Alternating on/off alarm sound.
Burglary alarm: Continuous high/low tone sweep.
Note: The siren is activated for a predefined "Bell Time" (refer to PowerMax+ / PowerMax Pro / PowerMaxComplete installer guide, par. 4.4), according to local authorities requirements, or until the system is disarmed, whichever occurs first.
- Squawk indications**
 By using a keyfob, High, mid or low siren squawk (beep) sounds can be used to indicate arming (1 squawk) and disarming (2 squawks) of the PowerMax+ / PowerMax Pro / PowerMaxComplete (as described in the user's guide section 7).
- Flash lights**
 Upon alarm, the siren lights start flashing until the system is disarmed.
- Triple Tamper protection**
 3 tamper switches are included; one under the front cover, second touching the mounting surface and third attached to the closure screw.
- Non-rechargeable 3.6V Lithium battery**
 When the battery voltage is low, low battery message is sent to the alarm control system. After the low voltage message delivery, at least 2 siren alarms will be possible before the siren will be totally inactive.




Figure 1 - External View

- 2-way full supervision**
 The siren is a fully supervised, 2-way communication device. It includes a receiver, to receive activation commands from the alarm system, and a transmitter, to periodically transmit its status signal to the alarm system.
 The transmitted signal strength can be measured during the installation (refer to PowerMax+ / PowerMax Pro / PowerMaxComplete installer guide, paragraph 5.2 – Diagnostic Test).
- Self-test feature**
 Upon pressing the MCS-710 self test switch for 3 seconds, the siren functional check is performed (low level sounds and flash lights indicate that that siren is serviceable).

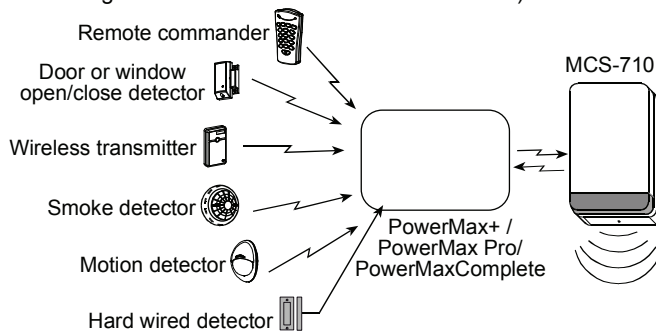


Figure 2 - Integration with the Alarm System

Note: When the PowerMax+ / PowerMax Pro / PowerMaxComplete is no longer used, or its power is switched off for a long period, the siren's internal battery should be removed to preserve battery life.

2. SPECIFICATIONS

Siren Type: Piezo, 100dB min. SPL @ 1m, 1.8-3.5 kHz, sweep frequency 7Hz

Internal Battery: One (optional: 2) 3.6V non-rechargeable Lithium battery, EEMB type ER34615M.

Note: Dispose of old battery according to its manufacturer's instructions.

Battery life expectancy: 3 years (for typical use)

Operating Frequency (MHz): 315, 433.92, 868.95, or other frequency according to the requirement in the country of use.

Receiver and Transmitter ID Type: 24-bit

Flash Lights Duration: 100ms ON, 900ms OFF

Dimensions (LxWxD): 30 x 19 x 7 cm (11-13/16 x 7-1/2 x 2-3/4 in)

Weight: 982g (34.6 oz.)

Operating Temperature: -30°C to 70°C (-22°F to 158°F)

Compliance with Standards: EN 50131-1 Grade 2 Class II, IP-55

The MCS-710 is compatible with the RTTE requirements - Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999.

3. INSTALLATION, TESTING AND ENROLLING

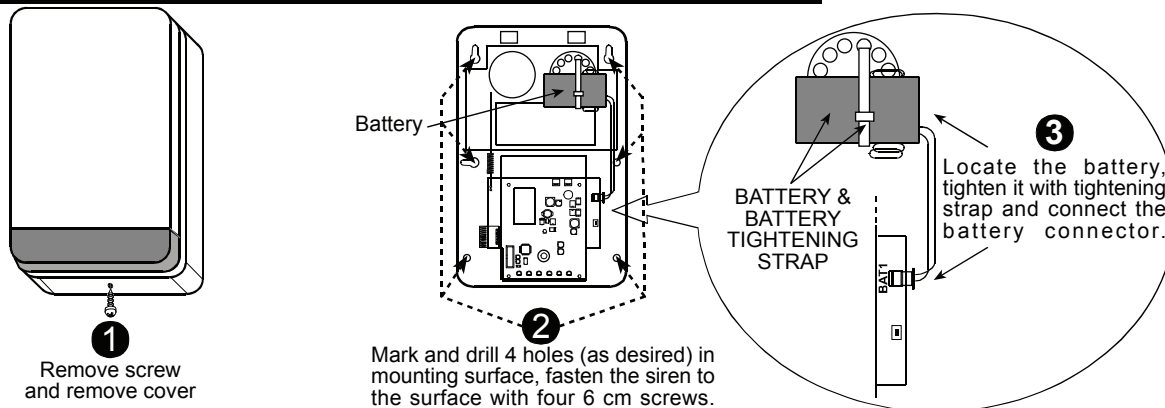


Figure 3 – Installation

ENROLLING, SELF TEST AND BATTERY TEST

A. ENROLLING

The alarm system (PowerMax+ / PowerMax Pro / PowerMaxComplete) must recognize the siren's unique identification code for command delivery and supervision. Perform enrolling as described in the alarm system's installer guide. When the TRANSMIT NOW instruction is displayed, press the SF TST switch for 1 - 3 seconds. Successful enrolling is indicated by flashes during 3 seconds.

B. SIREN SELF TEST

In an enrolled siren, pressing the SF TST switch for 1 - 3 seconds initiates the siren receiver test. One, two or 3 squawks will be heard to indicate poor, good or strong receiver, accordingly.

C. BATTERY TEST

Pressing the SF TST switch for more than 3 seconds initiates battery test. Low battery voltage is indicated by 3 flashes and 3 squawks. Good battery voltage is indicated by 1 flash and 1 squawk.

NOTES

- After the enrolling, close the siren cover and perform **DIAGNOSTIC TEST**, as described in alarm system's installer guide. Enrolling cancellation, if required, is also described in the alarm system's installer guide.
- To uninstall the siren without activating the siren: login the alarm system Installer Mode, remove the siren from the wall, remove the battery from the siren and delete the siren from the alarm system control panel.

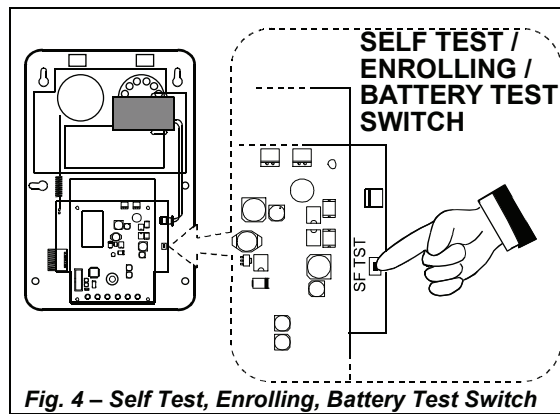


Fig. 4 – Self Test, Enrolling, Battery Test Switch

Interference Prevention

This device complies with FCC Rules Part 15. Operation is subject to two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference that may be received or that may cause undesired operation.

The digital circuit of this device has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in residential installations. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio and television reception. However, there is no guarantee that interference will not occur in a particular installation. If this device does cause such interference, which can be verified by turning the device off and on, the user is encouraged to eliminate the interference by one or more of the following measures:

- Re-orient or re-locate the receiving antenna.
- Increase the distance between the device and the receiver.
- Connect the device to an outlet on a circuit different from the one which supplies power to the receiver.
- Consult the dealer or an experienced radio/TV technician.

Changes or modifications not expressly approved by Visonic Ltd. could void the user's authority to operate the equipment.

WARRANTY

Visonic Limited (the "Manufacturer") warrants this product only (the "Product") to the original purchaser only (the "Purchaser") against defective workmanship and materials under normal use of the Product for a period of twelve (12) months from the date of shipment by the Manufacturer.

This Warranty is absolutely conditional upon the Product having been properly installed, maintained and operated under conditions of normal use in accordance with the Manufacturers recommended installation and operation instructions. Products which have become defective for any other reason, according to the Manufacturers discretion, such as improper installation, failure to follow recommended installation and operational instructions, neglect, willful damage, misuse or vandalism, accidental damage, alteration or tampering, or repair by anyone other than the manufacturer, are not covered by this Warranty.

The Manufacturer does not represent that this Product may not be compromised and/or circumvented or that the Product will prevent any death and/or personal injury and/or damage to property resulting from burglary, robbery, fire or otherwise, or that the Product will in all cases provide adequate warning or protection. The Product, properly installed and maintained, only reduces the risk of such events without warning and it is not a guarantee or insurance that such events will not occur.

THIS WARRANTY IS EXCLUSIVE AND EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, OBLIGATIONS OR LIABILITIES, WHETHER WRITTEN, ORAL, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR OTHERWISE. IN NO CASE SHALL THE MANUFACTURER BE LIABLE TO ANYONE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES FOR BREACH OF THIS WARRANTY OR ANY OTHER WARRANTIES WHATSOEVER, AS AFORESAID.

THE MANUFACTURER SHALL IN NO EVENT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, CONSEQUENTIAL OR PUNITIVE DAMAGES OR FOR LOSS, DAMAGE, OR EXPENSE, INCLUDING LOSS OF USE, PROFITS, REVENUE, OR GOODWILL, DIRECTLY OR INDIRECTLY ARISING FROM PURCHASER'S USE OR INABILITY TO USE THE PRODUCT, OR FOR LOSS OR DESTRUCTION OF OTHER PROPERTY OR FROM ANY OTHER CAUSE, EVEN IF MANUFACTURER HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

THE MANUFACTURER SHALL HAVE NO LIABILITY FOR ANY DEATH, PERSONAL AND/OR BODILY INJURY AND/OR DAMAGE TO PROPERTY OR OTHER LOSS WHETHER DIRECT, INDIRECT, INCIDENTAL, CONSEQUENTIAL OR OTHERWISE, BASED ON A CLAIM THAT THE PRODUCT FAILED TO FUNCTION.

However, if the Manufacturer is held liable, whether directly or indirectly, for any loss or damage arising under this limited warranty, **THE MANUFACTURER'S MAXIMUM LIABILITY (IF ANY) SHALL NOT IN ANY CASE EXCEED THE PURCHASE PRICE OF THE PRODUCT**, which shall be fixed as liquidated damages and not as a penalty, and shall be the complete and exclusive remedy against the Manufacturer.

When accepting the delivery of the Product, the Purchaser agrees to the said conditions of sale and warranty and he recognizes having been informed of.

Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so these limitations may not apply under certain circumstances.

The Manufacturer shall be under no liability whatsoever arising out of the corruption and/or malfunctioning of any telecommunication or electronic equipment or any programs.

The Manufacturers obligations under this Warranty are limited solely to repair and/or replace at the Manufacturer's discretion any Product or part thereof that may prove defective. Any repair and/or replacement shall not extend the original Warranty period. The Manufacturer shall not be responsible for dismantling and/or reinstallation costs. To exercise this Warranty the Product must be returned to the Manufacturer freight pre-paid and insured. All freight and insurance costs are the responsibility of the Purchaser and are not included in this Warranty.

This warranty shall not be modified, varied or extended, and the Manufacturer does not authorize any person to act on its behalf in the modification, variation or extension of this warranty. This warranty shall apply to the Product only. All products, accessories or attachments of others used in conjunction with the Product, including batteries, shall be covered solely by their own warranty, if any. The Manufacturer shall not be liable for any damage or loss whatsoever, whether directly, indirectly, incidentally, consequentially or otherwise, caused by the malfunction of the Product due to products, accessories, or attachments of others, including batteries, used in conjunction with the Products. This Warranty is exclusive to the original Purchaser and is not assignable.

This Warranty is in addition to and does not affect your legal rights. Any provision in this warranty which is contrary to the Law in the state or country where the Product is supplied shall not apply.

Warning: The user must follow the Manufacturer's installation and operational instructions including testing the Product and its whole system at least once a week and to take all necessary precautions for his/her safety and the protection of his/her property.

1/08

W.E.E.E. Product Recycling Declaration

For information regarding the recycling of this product you must contact the company from which you originally purchased it. If you are discarding this product and not returning it for repair then you must ensure that it is returned as identified by your supplier. This product is not to be thrown away with everyday waste. Directive 2002/96/EC Waste Electrical and Electronic Equipment.



VISONIC LTD. (ISRAEL): P.O.B 22020 TEL-AVIV 61220 ISRAEL. PHONE: (972-3) 645-6789, FAX: (972-3) 645-6788
 VISONIC INC. (U.S.A.): 65 WEST DUDLEY TOWN ROAD, BLOOMFIELD CT. 06002-1376. PHONE: (860) 243-0833, (800) 223-0020 FAX: (860) 242-8094
 VISONIC LTD. (UK): FRASER ROAD, PRIORY BUSINESS PARK, BEDFORD MK44 3WH. PHONE: (0870) 7300800 FAX: (0870) 7300801
 INTERNET: www.visonic.com

©VISONIC LTD. 2009 MCS-710, DE5421- (Rev. 7, 5/09)

